

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
21 May 2004 (21.05.2004)


PCT

(10) International Publication Number
WO 2004/042275 A1

- (51) International Patent Classification⁷: F21V 33/00, B07C 5/10, 5/342 // G01N 33/12, G01J 3/46
- (21) International Application Number: PCT/NO2003/000376
- (22) International Filing Date: 7 November 2003 (07.11.2003)
- (25) Filing Language: Norwegian
- (26) Publication Language: English
- (30) Priority Data: 20025363 8 November 2002 (08.11.2002) NO
- (71) Applicant (for all designated States except US): AK-
VAFORSK [NO/NO]; Institutt for akvakulturforskning
AS, N-1432 ÅS (NO).
- (72) Inventors; and
(75) Inventors/Applicants (for US only): AUSTRENG,
Erland [NO/NO]; Solfalls Kroken 1, N-1430 ÅS (NO).
RØRVIK, Kjell-Arne [NO/NO]; Kryssveien 24B, N-0583
Oslo (NO). MIKKELSEN, William [NO/NO]; Badehus-
gata 5, N-1440 Drøbak (NO).
- (74) Agent: BERGHEIM, Olav; Zacco Norway AS, P.O. Box
765, Sentrum, N-0106 Oslo (NO).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR,
CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD,
GE, GH, GM, GR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU,
SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: LIGHTING BOX

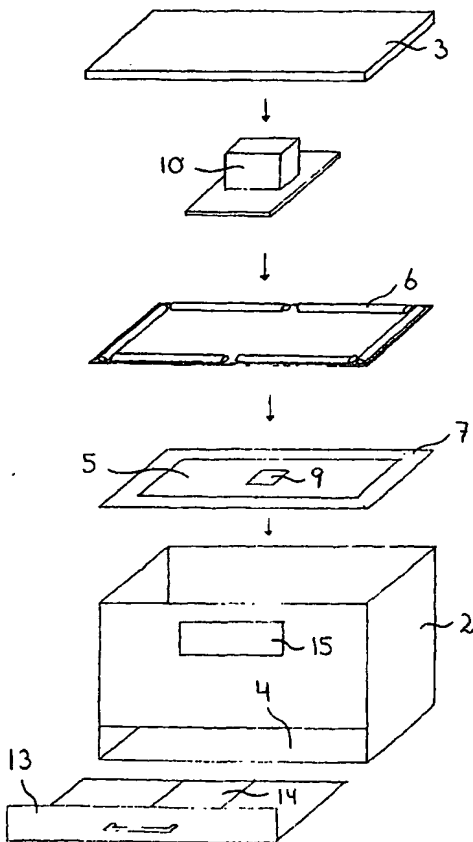

(57) Abstract: An illumination box (1) for true, reproducible colour reproduction of an object, comprising side walls (2), a top plate (3) and a bottom plate (4), wherein between the top plate (3) and the bottom plate (4) there is provided a light diaphragm (5) which divides the illumination box (1) into a light chamber (L) above the light diaphragm (5) and an object chamber (O) beneath the light diaphragm (5). The light diaphragm (5) admits and diffuses light from a plurality of light sources (6) arranged in the light chamber (L), and is attached to an essentially light-impenetrable screening frame (7) adjacent to the side walls (2). The plurality of light sources (6) are distributed along the side walls (2) at a distance from the side walls (2) and from the screening frame (7) such that an area (8) for placement of the object is screened from essentially all direct light from the plurality of light sources (6). An aperture (9) is also provided in the object chamber (O) for observation of the object.



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

Illumination box

The present application relates to an illumination box according to the preamble of independent claim 1.

A previously known illumination box is the so-called "Skretting box" (Salmon Colour Box, Skretting, Stavanger). This box is used by the Applicant to illuminate objects, in the form of salmon, for visual colour classification, and consists of an upper closed light chamber in which a plurality of fluorescent tubes are arranged, and a lower object chamber which is open in one of the sides for the insertion, observation and withdrawal of objects. A light diaphragm for diffusing the light from the fluorescent tubes is provided between the light chamber and the object chamber.

The colour of light is a function of its electromagnetic wavelength. Seven distinctive said colours can be distinguished from each other in the visible light spectrum, each representing a separate wavelength. These are red, orange, yellow, green, blue, indigo and violet. As known, absence of light in any colour results in black. A combination of the three primary light colours red, green and blue gives white light. Colours can be classified using different systems. The RGB system is one such system, where the letters R, G and B stand for red, green and blue respectively. The LAB system can be derived from the RGB system, or vice versa, and the letters L, A, and B define lightness, redness and yellowness respectively.

True colour reproduction when taking photographs requires uniform illumination of the object (so-called flat light or 0 light), and a problem with the Skretting box is that the illumination of the object is not sufficiently uniform for such colour reproduction. Another problem is that the open side of the box reflects light from the surroundings onto the object, which has a further adverse effect on the true colour reproduction of the object.

To solve the aforementioned problems, the present invention provides an illumination box as disclosed in the characterising clause of independent claim 1. Advantageous embodiments of the invention are set forth in the dependent claims.

The present invention is described in more detail in the following description with reference to the attached drawings, wherein:

Figure 1 is a side view of the illumination box according to the present invention;

Figure 2 is a sectional view of the illumination box in Figure 1;

Figure 3 is a split view of the illumination box in Figure 1;

Figure 4 is a top view of some of the parts in Figure 3;

Figure 5 is an enlarged side view of one of the fluorescent tubes in Figures 1-4;

Figure 6 is a graph showing the relationship between calculated colour number and colour number in the Roche colour rule;

Figure 7 is a graph showing the relationship between visual colour evaluation and predicted colour based on RGB values;

Figure 8 is a graph showing the relationship between chemical content of pigment in salmon and predicted values based on RGB measurements;

Figure 9 is a graph showing the relationship between fat content in salmon and predicted values based on RGB measurements; and

Figure 10 is a table showing average values for visual colour, chemical pigment, analysed and predicted, at the front and the back of a salmon.

Figures 1-5 show an illumination box 1 according to the present invention, for true, reproducible colour reproduction of an object. The illumination box 1 comprises side walls 2, a top plate 3 and a bottom plate 4. Between the top plate 3 and the bottom plate 4, and essentially parallel to at least the bottom plate 4, there is provided a light diaphragm 5 which divides the illumination box 1 into a light chamber L above the light diaphragm 5 and an object chamber O beneath the light diaphragm 5. The light diaphragm 5, preferably made of the diffuser material Opal plastic, admits and diffuses light from a plurality of light sources, preferably fluorescent tubes 6, arranged in the light chamber L. The light diaphragm 5 is attached to an essentially light-impenetrable screening frame 7 adjacent to the side walls 2, with the plurality of fluorescent tubes 6 distributed along the side walls 2 at a distance from the side walls 2 and from the screening frame 7 such that an area 8 for placement of the object is screened from

essentially all direct light from the fluorescent tubes 6, indicated by the border lines R in Figure 2. The fluorescent tubes are preferably of a type corresponding to Osram No. 12-950 (55W, about 5800 Kelvin). An access hatch 15 for access to the light chamber L is also shown in Figures 1 and 3. During use, the illumination box 1 is essentially closed to incoming external light.

An aperture 9 for observation of the object is also provided in the object chamber O. The aperture 9 shown in the figures is located in a central area of the light diaphragm 5 for photographing the object with a camera 10 located in the light chamber L, there being provided light-impenetrable, non-reflecting means 11 in the form of a black bellows which forms a channel between the lens aperture 12 of the camera 10 and the aperture 9 in the light diaphragm 5.

The bottom plate 4 in the object chamber is preferably provided with a drawer 13 for the insertion and withdrawal of the object. A loose tray 14 is preferably provided in this drawer for placement of the objects.

As a non-illustrated alternative, the camera 10 may be arranged on the top plate 3, and an aperture for the lens aperture 12 of the camera 10 may be provided in the top plate 3. It is also possible that the aperture 9 into the object chamber O may instead be provided through one of the side walls 2, and that non-illustrated prisms or mirrors in the object chamber O permit observation or photographing of the object. The tray 14 for placement of the object may be inclined on the bottom plate 4, which may allow direct observation or photographing of the object through an aperture in one of the side walls 2 into the object chamber O.

The inside of the top plate and the bottom plate is advantageously matt black, and the inside of the side wall is preferably white or black, although this cannot be seen from the drawings.

Furthermore, as shown in Figure 5, a sleeve-shaped shade 16 of said Opal plastic is provided around each one of the fluorescent tubes to further diffuse the light.

In an advantageous embodiment of the illumination box 1, the side walls 2 and the bottom plate are rectangular, the bottom plate 4 having a long side and a short side. The long side has an internal length of 90 cm and the short side has an internal length of 62 cm, which correspond to the length and breadth of the screening frame 7. The screening

frame has a thickness, measured on a level with the light diaphragm 5, of 10 cm. Furthermore, the height between the interior bottom of the drawer 13 and the light diaphragm 5 is 51 cm, and the height between the light diaphragm 5 and the inside of the top plate 3 is 20 cm. The centrally located aperture 9 in the light diaphragm is square, having a breadth and length of 14.5 cm. In this embodiment of the illumination box 1 four fluorescent tubes having the aforementioned specifications are provided, one along each side wall 2. A sleeve-shaped shade 16 of said Opal plastic having an outer diameter of 5 cm is arranged around each one of the fluorescent tubes 6. The shade 16 is 2-3 cm longer than the fluorescent tube 6, and thus extends past the fluorescent tube 6 at each end thereof. The thickness of the light diaphragm 5 and the shade 16 is about 3 mm.

In the aforementioned embodiment all the fluorescent tubes 6 are placed at exactly the same height in the illumination box 1, and all reflective surfaces of the fluorescent tubes 6, camera 10, walls 2 and top plate 3 are covered, as this is considered to be an important factor for an optimal result.

In an embodiment based on the aforementioned embodiment, the illumination box 1 according to the present invention is used for verifying prediction equations for visual colour, pigment content and fat content in salmon, these criteria being important for the quality classification of the salmon, and which thus have a major effect on the wholesale price thereof. Here, it should be mentioned that colour evaluation of salmon has previously been carried out visually by the Applicant using the aforementioned Skretting box, and by manual comparison of each salmon fillet with a Roche colour rule.

The starting point for calculating prediction equations for visual colour, chemical content of pigment and fat has been based on RGB values arrived at by calculating average values in a defined large area of the salmon fillets. Salmon have varying colour and fat content depending on where in the salmon measurements are made. Salmon has a stronger visual colour and a higher pigment content at the back of the fish than at the front, whilst the reverse is true for fat. The Applicant has therefore chosen to use the area of the fish that is described in the Norwegian standard "Norsk Kvalitet Snitt" (NKS, NS 9401). This is the area between the anus and the dorsal fin of the fish. Average RGB values are thus measured in an elliptical area across the spine (centred with respect to longitudinal muscle segments), and cover the whole longitudinal direction of the NKS area.

First, to document a relationship between the colour scale (Roche colour rule) that is used today for visual evaluation of salmon and the Applicant's RGB values, six colour rules were photographed six times. The position of each individual rule was changed between each image so that each individual rule had all positions in the image. Since each rule consists of 15 shades of red (colour nos. 20-34), there was a total of 540 individual observations. A regression analysis based on the RGB values from all 540 individual observations showed a statistically reliable ($p < 0.0001$) relationship between the RGB values obtained in the Applicant's image analysis and the commercial colour scale developed by Roche for use in the visual evaluation of the colour of salmon (see Fig. 6). Of the total variation of red found in the commercial colour rule produced by Roche, the Applicant manages to explain 98.6% (R^2) by systematic changes in measured RGB values; in other words, an almost exact colour reproduction.

Therefore, there is a scientific basis for asserting that the Applicant's standardisation and light setting of the illumination box provides a basis for distinguishing shades of red, and thus being able objectively to evaluate the visual colour of the salmon in accordance with the colour values used by Roche.

As evidence of the applicability of the illumination box, a test was carried out on fish material where a large spread of quality characteristics was expected. Twelve salmon from the weight classes 1, 2, 3 and 4 kilos were photographed and analysed with respect to RGB values in the NKS area and in a corresponding area in front of the dorsal fin. Each salmon was thus analysed at two different points in order, if possible, to be able to document variations in the salmon, a total of 24 observations. The same areas of the fish were analysed with respect to visual colour, chemical pigment and fat content.

By regression analysis a statistically reliable relationship ($p < 0.0001$) was found between measured RGB values and visual evaluation of the colour of the salmon. Of the total variation in visually evaluated red in accordance with the commercial colour rule produced by Roche, 89.3% (R^2) is explained by changes in measured RGB values (see Fig. 7).

As for visual colour, a statistically reliable relationship ($p < 0.0001$) was found between measured RGB values and chemical content of pigment in the salmon. Of the total variation in pigment (range 3.5-10.0 mg/kg), measured RGB values explained 85.6% of analysed chemical values (see Fig. 8).

A statistically reliable relationship ($p < 0.0001$) was also found between measured RGB values and chemical content of fat in the salmon. Of the total variation in fat content (range 7.6-23.3%), measured RGB values explained 64.5% of analysed chemical values (see Fig. 9).

The slightly lower relationship of the analysed values compared with the Roche rule may be connected with the fact that, unlike the colour rule, all analyses are subject to analysis variations.

To examine whether the photostandardisation managed to detect differences in fat and colour at the front and back of the salmon, and to compare analysed and RGB predicted values, comparisons in one fish were made. Figure 10 shows very good conformity between analysed and RGB predicted values, and both sets of values show that the salmon has a higher fat content at the front than at the back, whilst the opposite was found for both visual and chemical colour.

In the case of the aforementioned exemplary embodiment, the required specifications for the camera are that the aperture and shutter values are not altered from image to image, and that the CCD chip is kept at a stable temperature so that the RGB values do not change during exposure.

Therefore, in the exemplary embodiment the camera used was of the type Sinarback 23HR, 2000x3000 pixels, 1-4-16 shot with a piezoplate for true RGB colour registration. The CCD chip is kept at a stable temperature using a Peltier element and fan. A CCD chip with Bayer Pattern and 36 MB raw filter with 14-bit colour depth was used. The camera system has means for accurate colour calibration and shading function. Calibration takes place via a Gretag Mactbeth colour card for 24 colours, and the glass irregularities of the lens are compensated for via said shading function. The shutter system in the Sinarcam 2 unit has great precision as regards aperture control and shutter time repeatability. The camera control program (Mac-based) allows for the control and drive of image files. The ambient working temperature is within the range of $+5 - +45^{\circ}\text{C}$, and the relative humidity is within the range of 5-80%.

In the exemplary embodiment the camera 10 was arranged on the top plate 3, i.e., outside the illumination box 1, an aperture for the lens aperture 12 of the camera 10 was provided in the top plate 3, a further aperture 9 was provided in the centre of the light

diaphragm 5 and a black, channel-forming bellows 11 was arranged between the two apertures, as described above.

P a t e n t c l a i m s

1.

An illumination box (1) for true, reproducible colour reproduction of an object, comprising side walls (2), a top plate (3) and a bottom plate (4), wherein between the top plate (3) and the bottom plate (4) there is provided a light diaphragm (5) which divides the illumination box (1) into a light chamber (L) above the light diaphragm (5) and an object chamber (O) beneath the light diaphragm (5), which light diaphragm (5) admits and diffuses light from a plurality of light sources (6) arranged in the light chamber (L), characterised in that the light diaphragm (5) is attached to an essentially light-impenetrable screening frame (7) adjacent to the side walls (2), with the plurality of light sources (6) distributed along the side walls (2) at a distance from the side walls (2) and from the screening frame (7) such that an area (8) for placement of the object is screened from essentially all direct light from the plurality of light sources (6), and that an aperture (9) is provided in the object chamber (O) for observation of the object.

2.

An illumination box according to claim 1, characterised by being essentially closed to external light.

3.

An illumination box according to one of the preceding claims, characterised in that the light diaphragm (5) is arranged essentially parallel to the bottom plate (4).

4.

An illumination box according to one or more of the preceding claims, characterised in that the aperture (9) is in the form of a hole in a central area of the light diaphragm (5) for photographing the object using a camera (10) located on the top plate (3), and that there are also provided light-impenetrable, non-reflective means (11) which form a closed channel between the lens aperture (12) of the camera (10) and the hole in the light diaphragm (5).

5.

An illumination box according to one or more of the preceding claims, characterised in that the plurality of light sources (6) is in the form of a plurality of fluorescent tubes, preferably of the type with the specifications 55W, about 5800 Kelvin.

6.

An illumination box according to one or more of the preceding claims, characterised in that the bottom plate (4) in the object chamber (O) is provided with a drawer (13) for insertion and withdrawal of the object.

7.

An illumination box according to one or more of the preceding claims, characterised in that the inside of the top plate (3) and the bottom plate (4) is matt black, and that the inside of the side walls (2) is white or black.

8.

An illumination box according to one or more of claims 4-7, characterised in that the aperture and shutter values of the camera (10) are not altered from image to image, and that the CCD chip of the camera is kept at a stable temperature so that RGB values are not changed during exposure.

9.

An illumination box according to one or more of claims 5-8, characterised in that a sleeve-shaped shade (16) of diffuser material surrounds each of the plurality of fluorescent tubes (6).

10.

An illumination box according to one or more of claims 5-9, characterised in that the number of fluorescent tubes (6) is four.

1/7

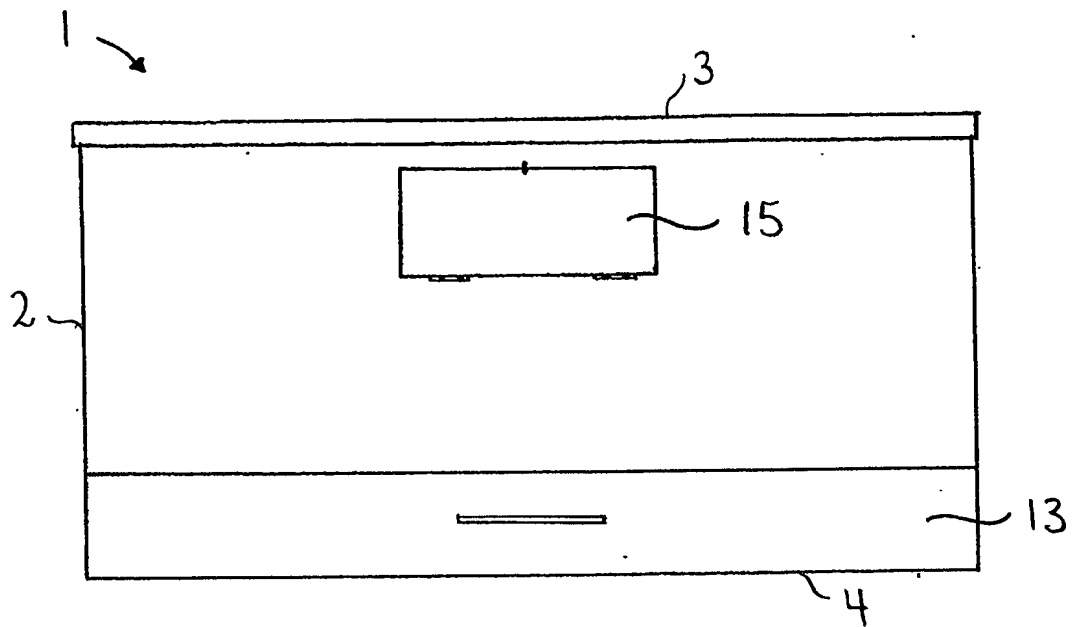


Fig. 1

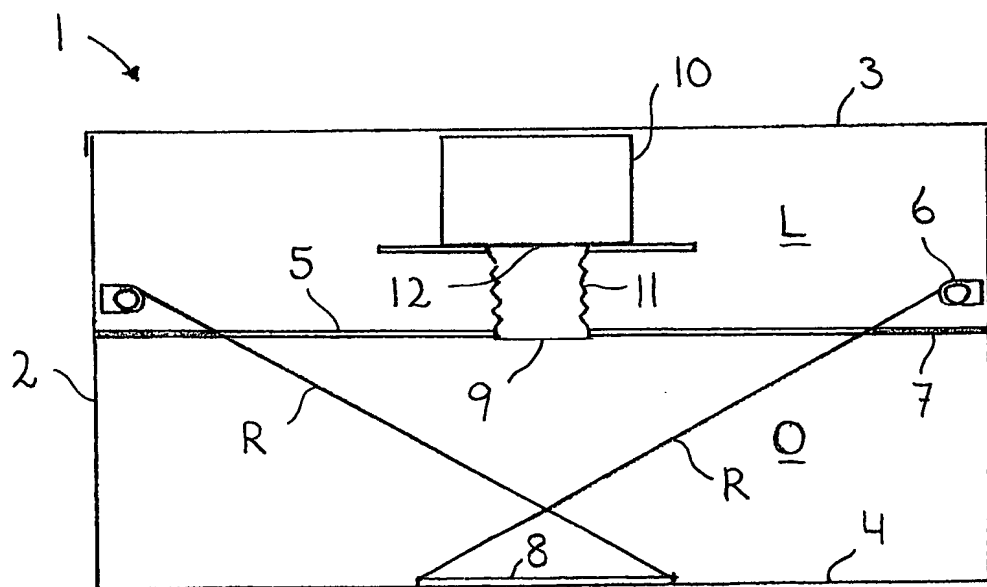


Fig. 2

2/7

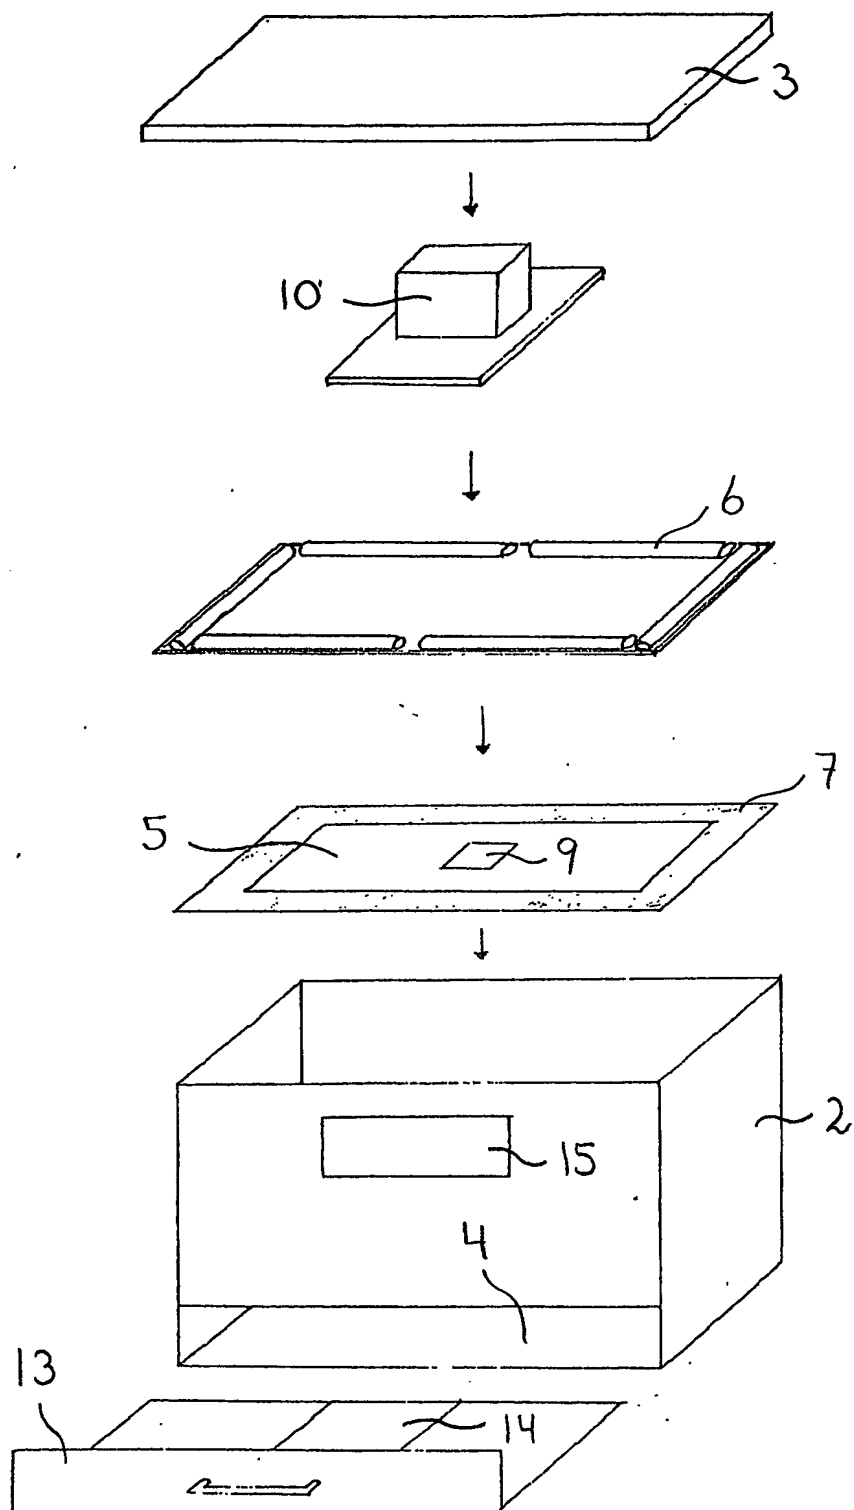


Fig. 3

3/7

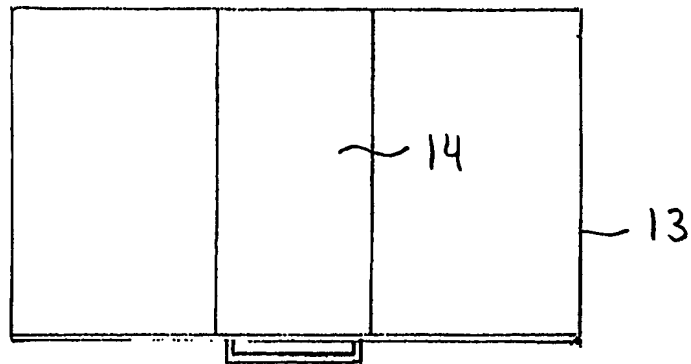
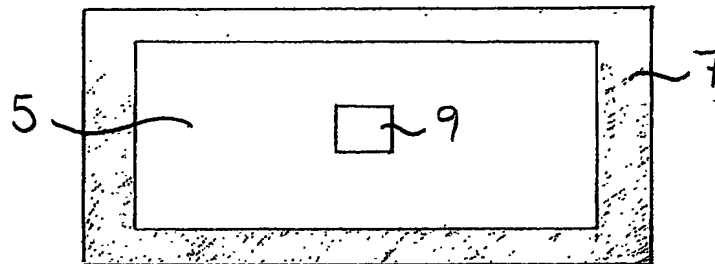
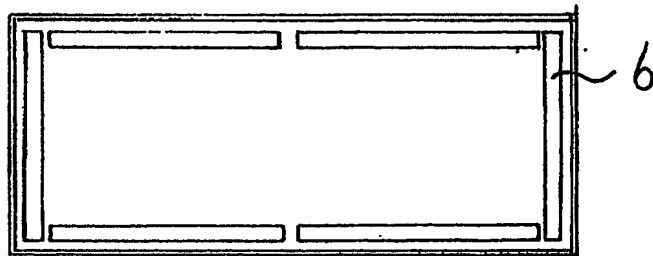



Fig. 4

4/7

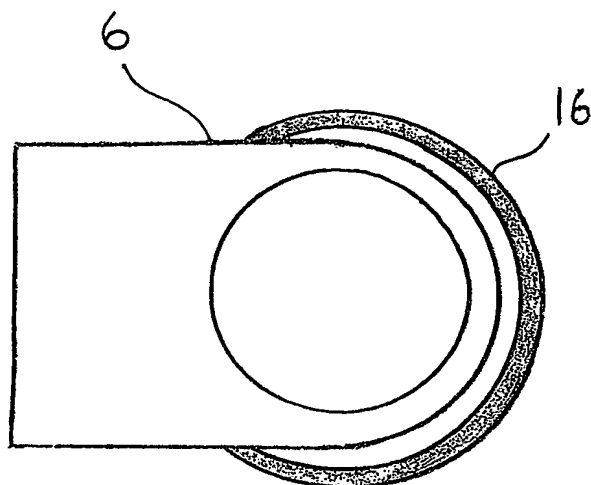


Fig. 5

5/7

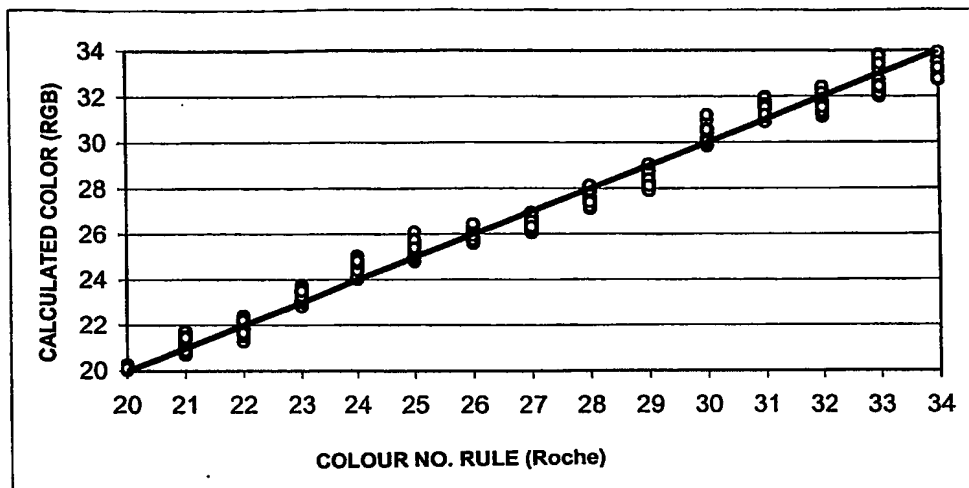


Fig. 6

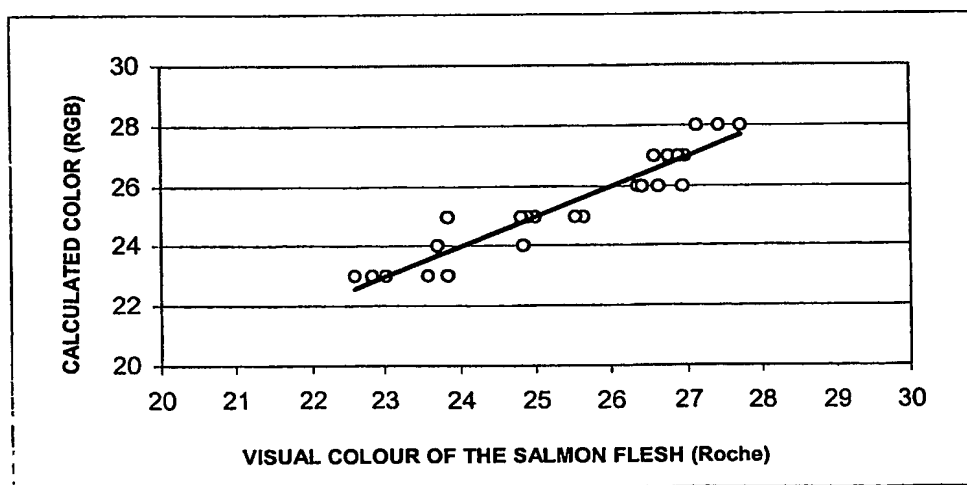


Fig. 7

6/7

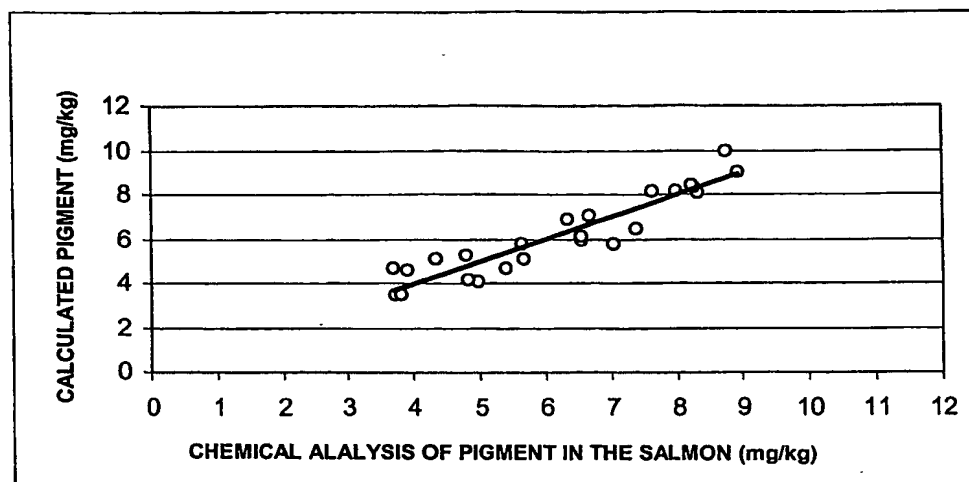


Fig. 8

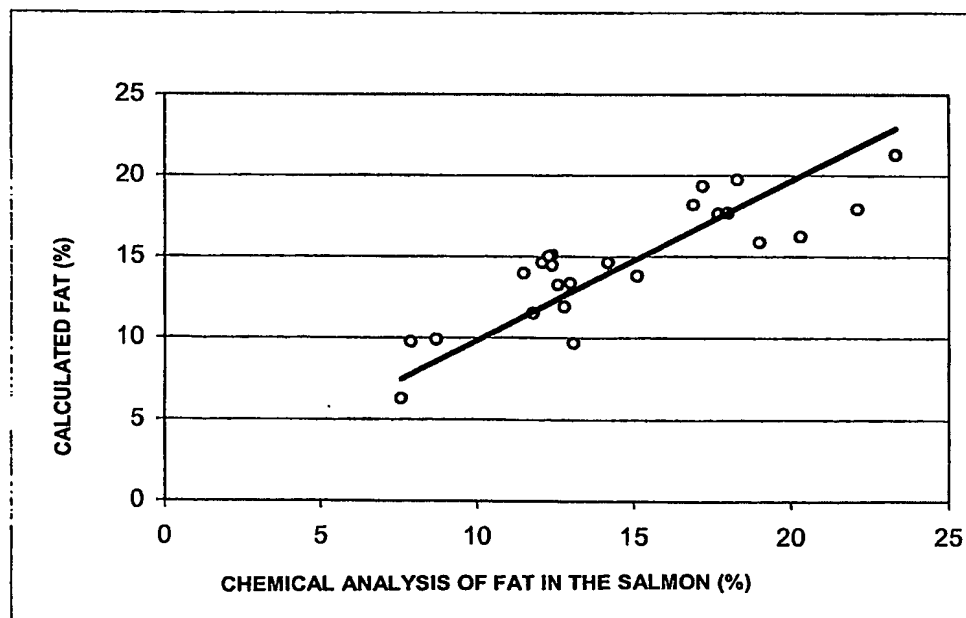


Fig. 9

7/7

QUALITY CHARACTERISTICS	AT THE FRONT OF THE SALMON		AT THE BACK OF THE SALMON (NKS)	
	Analyzed	Predicted	Analyzed	Predicted
Visual color (No.)	25.2	25.3	25.8	25.6
Pigment content (mg/kg)	5.6	5.8	6.8	6.8
Fat content (%)	17.5	17.1	11.4	12.2

Fig. 10

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 2003/000376

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: F21V 33/00, B07C 5/10, B07C 5/342 // G01N 33/12, G01J 3/46
 According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: F21V, B07C, G01N, G01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2809642 A1 (UNIVERSITE DE LA ROCHELLE ETABLISSEMENT PUBLIC), 7 December 2001 (07.12.2001), page 11, line 9 - page 12, line 18	1-4
Y	--	5-10
Y	WO 9521375 A1 (TULIP INTERNATIONAL A/S), 10 August 1995 (10.08.1995), page 4, line 1 - page 7, line 9; page 15, line 20 - page 16, line 29	5,7-10
Y	US 6454939 B1 (JEFFREY S. HAAS ET AL), 24 Sept 2002 (24.09.2002), page 3, line 30 - line 59	6

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"B" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

20 January 2004

Date of mailing of the international search report

03 -02- 2004

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Antonio Farieta/MN

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 2003/000376

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5676256 A (PRADEEP KUMAR ET AL), 14 October 1997 (14.10.1997), column 4, line 10 - column 6, line 49 --	1-10
A	US 4812904 A1 (RICHARD B. MARLING ET AL), 14 March 1989 (14.03.1989), column 2, line 5 - column 3, line 2 -- -----	1-10

INTERNATIONAL SEARCH REPORT
Information on patent family members

24/12/2003

International application No.

PCT/NO 2003/000376

FR	2809642	A1	07/12/2001	NONE			
WO	9521375	A1	10/08/1995	DK	9500046	U	28/04/1995
				EP	0692090	A	17/01/1996
US	6454939	B1	24/09/2002	US	6096205	A	01/08/2000
				US	6101799	A	15/08/2000
US	5676256	A	14/10/1997	AT	215852	T	15/04/2002
				AU	1553895	A	17/07/1995
				CA	2180005	A	06/07/1995
				DE	69430386	D,T	12/12/2002
				DK	737112	T	15/07/2002
				EP	0737112	A,B	16/10/1996
				SE	0737112	T3	
				ES	2177628	T	16/12/2002
				US	5520290	A	28/05/1996
				WO	9517974	A	06/07/1995
US	4812904	A1	14/03/1989	NONE			